



POWDER WEIGHING CABINET



FlowFAST H-RF
Safety Workbench



DASITGROUP



PROTECTION, SAFETY, RELIABILITY.
AND MORE.

FlowFAST H-RF

Powder Weighing Cabinet

Operator and
Environment
Protection

In a nutshell...

TECHNICAL SPECIFICATION

- ✓ Body carcass made in corrosion-proof epoxy painted steel treated with Dupont Alesta® antibacterial coating.
- ✓ One piece work surface made in AISI 304L stainless steel (TRESPA work surface available upon request).
- ✓ G4 pre-filter stage.
- ✓ H14 HEPA/ULPA filter according to CEN EN 1822.
- ✓ Air cleanliness in Class ISO 3, according to ISO 14644-1
- ✓ Epoxy painted protective grid.
- ✓ One electrical socket as standard.

WORKBENCH DIMENSIONS

- ✓ 0,9 m
- ✓ 1,2 m
- ✓ 1,5 m
- ✓ 1,8 m



Faster FlowFAST H-RF is a safety workbench conceived for personnel and environment protection against powders and aerosol contamination.

FlowFAST H-RF working principles is a reverse flow mode, the air inlet is from the environment and the unit works as a total exhaust hood. The whole amount of the air is aspirated from the external environment and exhausted into the laboratory after being filtered by means of an H14 HEPA/ULPA filter. FlowFAST H-RF, with the perfect ergonomics for its application, record noise levels far below normative boundaries [$<55\text{dB(A)}$].

Main applications within chemicals laboratories:


- ✓ weighing processes (micro and semi-micro balances according to USP requirements)
- ✓ weighing of no/low toxic powdered substances
- ✓ sampling and decanting
- ✓ product transfer
- ✓ working with sifting machines

MAIN ACCESSORIES

- ✓ Active carbon filter on the exhaust.
- ✓ Solvent sensor (available in combination with the optional automatic air flow speed regulation with digital anemometer).
- ✓ Additional H14 HEPA/ULPA filter on the exhaust.
- ✓ Closing shutter with or without integrated UV light.
- ✓ DEHS test port.
- ✓ Additional service connection for electrical power.
- ✓ Service connection for gas/vacuum tap.
- ✓ Automatic air flow speed regulation and digital anemometer.
- ✓ Epoxy powder painted steel stand.

OPERATIONAL PRINCIPLES

Ambient air is aspirated from the front of the cabinet and then filtered by means of G4 pre-filter and H14 HEPA/ULPA filter prior to being exhausted into the environment.

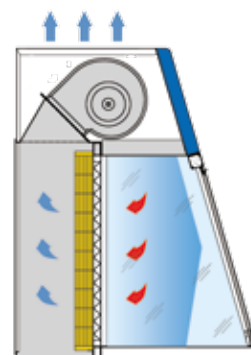

Cultek S.L.U.
Av. Cardenal Herrera Oria, 63
28034 Madrid (Spain)
Tel.: +34 902 044 000
Tel.: +34 917 290 333
Fax: 34 91 358 17 61
e-mail: cultek@cultek.com

www.cultek.com



Faster S.r.l.

Via R. Merendi, 22 20010 Cornaredo (MI) Italy
Tel +39 02 93 991 92 Fax +39 02 93 991 608
www.faster-air.com info@faster.dgroup.it



**FASTER
FOR A
GREEN
FUTURE**

Striving everyday to improve our environmental performance, Faster developed environmental procedures are founded on three guiding principles:

- ✓ Protect the Environment for present and future generations manufacturing low energy consumption equipments.
- ✓ Reduce risks and improve efficiencies.
- ✓ Introduce improved technology and processes.